


B.RO X40 DISPLAY

Ricevitore Rolling Code Allmatic con **4 canali e display**.
 Apprendimento fino a 1000 trasmettitori.

Allmatic Rolling Code receiver with **4 channels and display**.
 Learning up to 1000 transmitters.

- Ricevitore radio Rolling Code 433Mhz compatibile con tutti i radiocomandi Rolling Code Allmatic.
- Fino a 1000 trasmettitori con memoria dedicata.
- Funzionamento facile e intuitivo grazie alla interfaccia a display e 3 tasti.
- 4 uscite a relè (16A a 230 Vac) con contatto normalmente aperto e chiuso.
- 4 ingressi cablati, uno per ogni relè.
- Alimentazione 12-24 Vdc/Vac con selezione automatica della tensione.
- Funzionamento del relè personalizzabile e differenziato per ogni tasto del trasmettitore / ingresso cablati:
 - immediato;
 - passo passo;
 - temporizzato;
 - temporizzato con ritardo.
- Protezione e gestione del menu tramite password.
- 3 tipologie di apprendimento per i tasti del trasmettitore:
 - Default personalizzabile;
 - Sequenziale;
 - Avanzato.
- Gestione del trasmettitore da display:
 - inserimento in memoria in posizione scelta;
 - disattivazione/attivazione di un trasmettitore;
 - modifica della funzionalità di ogni tasto;
 - cancellazione di un singolo trasmettitore.
- Dimensioni box: 116 x 90 x 42 mm.
- 433Mhz Rolling Code radio receiver compatible with all Allmatic Rolling Code remotes.
- Up to 1000 transmitters with dedicated memory.
- Easy and intuitive functioning thanks to the display interface and 3 keys.
- 4 relay outputs (16A at 230 Vac) with dry contact normally open and closed.
- 4 wired inputs, one for each relay.
- Power supply 12-24 Vdc/Vac with automatic selection of the voltage.
- Functioning of the relay customizable and differentiated for each key of the transmitter / wired input:
 - immediate;
 - step by step;
 - time controlled;
 - time controlled with delay.
- Menu protection and management through password.
- 3 types of learning for the keys of the transmitter:
 - Default with personalization;
 - Sequential;
 - Advanced.
- Management of the transmitter through display:
 - insertion in memory in chosen position;
 - disabling/enabling of a transmitter;
 - change of the functioning of each key;
 - deleting of a single transmitter.
- Box dimensions: 116 x 90 x 42 mm.

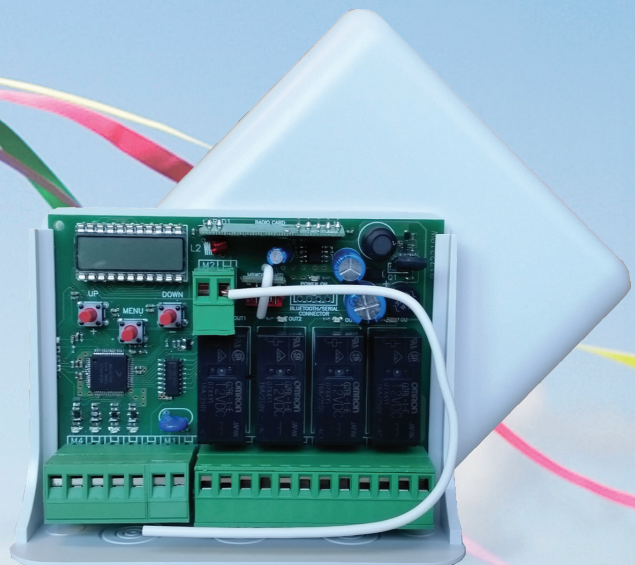

B.RO X40 DISPLAY 12005756

- *Friendly & direct relationship*
- *Research & innovation*
- *High quality & simplicity*
- *Excellent customer service*

allmatic.com

DESIGNED & MADE IN ITALY